



High Performance, Quad Port 10GbE Unified Wire Adapter

Enables TCP, UDP, iSCSI, iWARP, and FCoE Offload over
Single Unified Wire with SR-IOV, EVB/VNTag, DCB

Highlights

- PCI Express Gen2 x8
- Low Latency
- Full TCP & UDP offload
- TCP Chimney
- Full iSCSI, FCoE offload
- Full iWARP RDMA offload
- EVB, VEPA, Flex10, VNTag
- PCI-SIG SR-IOV
- Integrated media streaming offload
- HW based firewall in the cloud
- Traffic filtering & management

Applications

Data-Center Networking

- Scale up servers and NAS systems
- Link servers in multiple facilities to synchronize data centers
- Consolidate LAN, SAN, and cluster networks

Cloud Computing

- Virtualization features to maximize cloud scaling and utilization
- Runs InfiniBand, Fibre Channel apps unmodified on Ethernet
- Cloud ready functional and management features
- QoS and Traffic management

Networked Storage

- Enable high performance NAS systems and Ethernet-based IP SANs
- Develop shared-storage systems providing both file- and block-level services


High Performance Computing

- Very low latency Ethernet
- Increase cluster fabric bandwidth
- Deploy Ethernet-only networking for cluster fabric, LAN, and SAN

Overview

Chelsio's T440-LP-CR is a single QSFP+ port 10 Gigabit Ethernet Unified Wire adapter with PCI Express 2.0 host bus interface. It is capable of providing four 10GbE ports by using a special octopus cable that has a QSFP transceiver on one end and four SFP+ transceivers on the other end.

T440-LP-CR is optimized for cloud computing, HPC, virtualization, storage, and other data center applications. The fourth-generation (T4) technology from Chelsio provides the highest 10GbE performance and dramatically lowers host-system CPU communications overhead with on-board hardware that off-loads TCP/IP, iSCSI, FCoE and iWARP RDMA processing from its host system.

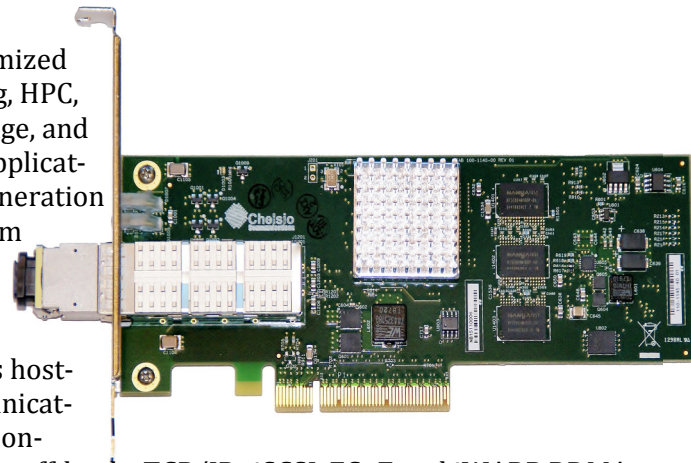

The Unified Wire Solution

With the T440-LP-CR, Chelsio is enabling a unified wire for LAN, SAN and cluster traffic. This unified wire was made possible by the high bandwidth and low latency of 10GbE combined with storage and cluster protocols operating over TCP/IP (iSCSI, FCoE and iWARP respectively). In parallel, operating systems and hypervisors have incorporated native support for iSCSI and database applications are now supporting file-based storage protocols such as NFS as an alternative to SANs.

T440-LP-CR includes a full-fledged integrated Traffic Manager for robust flow control, traffic management and QoS.

Fibre Channel over Ethernet (FCoE) provides a transition path from legacy SANs to converged networks. Expanding its unified wire approach, Chelsio has added FCoE hardware support to the new T440-LP-CR adapter.

The adapter's quad ports and IEEE 802.3ad link aggregation/failover features are ideal for critical network applications that require redundancy and high-availability capabilities.

T440-LP-CR Ethernet-only networking reduces the data center's cost in network adapters, cables, switches, rack space, power, equipment spares, management tools, planning, networking skills, and installation.

T4 - Fourth-Generation Protocol Offload Engine

The T4 is Chelsio's fourth-generation TCP offload (TOE) design, third-generation iSCSI design, and second-generation iWARP (RDMA) implementation. For the server connection, the T4 chip includes a PCI Express v2.0 x8 host interface. With support for the 5Gbps Gen2 data rate, the PCIe interface provides up to 32Gbps of bandwidth to the server. T4 also adds support for PCIe I/O virtualization. Most of T4 features are enhanced versions of those found in T3. Features that carry over from T3 include stateless offloads, packet filtering (firewall offload), and traffic shaping (media streaming).

Complete and Flexible TCP Offload

The T4 has hundreds of programmable registers for protocol configuration, RFCs, and offload control. The T440-LP-CR can offload TCP processing per connection, per-server, per-interface, and globally and simultaneously tunnel traffic from non-offloaded connections to the host processor for the native TCP/IP stack to process. The T440-LP-CR provides a flexible zero copy capability for regular TCP connections, requiring no changes to the sender, to deliver line rate performance at minimal CPU utilization.

Packet Switching and Routing

T440-LP-CR integrates a high performance packet switch, which allows switching traffic from any of the input ports to any of the output ports (wire-to-wire) and from any of the output ports to any of the input ports (host-to-host).

Robust, Proven Solution

Subjected to thousands of hours of compatibility testing, over multiple years of stress testing by several OEM test suites and production deployments in servers, storage systems and cluster computing, Chelsio's robust, stable protocol offload technology delivers proven performance in a wide range of environments. The T440-LP-CR is generations ahead of competing products.

Software Drivers

Chelsio offers a full suite of protocol software and drivers with the T440-LP-CR adapters. See www.chelsio.com/support for latest info. The software supports operation in both protocol-offload and non-offload modes.

Ordering info

Model: T440-LP-CR
Physical interface: 40GBASE-SR4*
Connector: MTP
Media: MMF for SR, SMF for LR, & Cu for DAC

Accessories

SM40G-SR: 40G short-reach SFP+ optic module
OCTCABLE5M-SR: QSFP octopus optical cable, 5M
OCTTAPCABLE3M: QSFP-to-4xSFP+ Twinax passive

*Octopus cable sold separately. Only Chelsio-supplied modules may be used

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH CHELSIO PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN CHELSIO'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, CHELSIO ASSUMES NO LIABILITY WHATSOEVER, AND CHELSIO DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF CHELSIO PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. CHELSIO PRODUCTS ARE NOT INTENDED FOR USE IN MEDICAL, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS. CHELSIO MAY MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME, WITHOUT NOTICE.

Chelsio Communications www.chelsio.com sales@chelsio.com +1-408-962-3600

Specifications

Host Interface

- PCI Express Gen2 x8
- MSI-X, MSI and support for legacy pin interrupts

High Performance RDMA

- Low latency and line rate bandwidth
- Enhanced RDMA primitives
- iWARP support on Linux OFED
- Microsoft Network Direct support

UDP & Multicast Offload

- UDP Sockets API
- Low user-to-user latency
- Multicast replication on ingress or egress

Virtualization

- PCI-SIG SR-IOV
- 128 Virtual and 8 Physical functions
- 144 port virtual switch
- EVB, VEPA, Flex10, VNTag
- 336 virtual MAC addresses

FCoE

- Full HBA FCoE (Initiator or Target)
- Open-FCoE Offload (Initiator)
- CRC32 offload generation & verification
- Ingress & Egress ACL (Access Control List)

iSCSI Acceleration

- Full iSCSI initiator and target mode stack
- CRC32 offload generation & verification
- iSCSI proxy switching based on SCSI CDB
- Full HBA offload

TCP/IP Full Offload

- Full TCP implementation including IPv4 & IPv6
- Microsoft Chimney support
- Extensive RFC compliance, fully featured stack
- Full TCP Proxy between any set of connections
- VLAN support up to 4096 different VLAN IDs
- Load balancing and Fail-over capabilities

Stateless Offloads

- TCP/UDP checksum offload for IPv4 & IPv6
- TSO, LSO, and GSO for IPv4 & IPv6
- VLAN filtering, insertion & extraction
- Line rate packet filtering and attack protection
- Fine granularity time stamping (down to 4ns)
- Ethernet Routing (packet header rewrite)
- Packet Tracing and Packet Sniffing

Ethernet

- IEEE 802.3ae (10 GbE)
- IEEE 802.3z (1 GbE) compliant
- IEEE 802.1P priority
- IEEE 802.1Q VLAN tagging
- IEEE 802.1Qbg EVB/VEPA
- IEEE 802.1Qbh VNTag
- IEEE 802.3x flow control
- IEEE 802.3ad load-balancing and failover
- Ether II and 802.3 encapsulated frames
- Multiple MAC addresses per interface
- Jumbo Frames up to 9.6Kbytes

Physical and Environmental

- Dimensions without bracket:
6.6 in. x 2.71 in. or 16.76 cm x 6.88 cm
- Operating Temp: 0 to 55°C or 32 to 131°F
- Operating Humidity: 5 to 95%
- Airflow: 200 lf/m
- Typical power consumption: 12.65W